



AXIAL DC FAN

40X40X10mm

DIMENSIONS(UNIT mm):

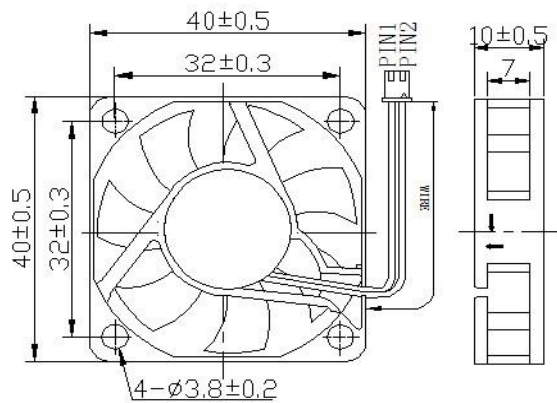

PERFORMANCE CURVE:

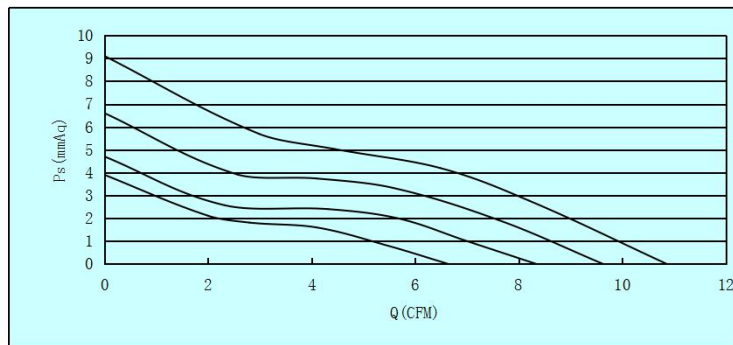

FRAME TYPE:

Plastic housing and blade material are UL 94V-0 rating

Impeller:

Plastic(UL:94-0)

Bearing:

Ball/1Ball/Sleeve Bearing:

Operating Temperature:

-10°C to +70°C

Lead Wire:

UL 1007 AWG#26

Voltage Available:

5/12V/24V

Weight:

16grams

SPECIFICATIONS(NOMINAL):

MODEL	Bearing			Rated	Speed	Rated	Power	AirFlow	StaticPressure	Noise
	SE	B1	B2	Voltage (v)	(RPM)	Current (A)	(W)	(CFM)	(mm-Aq)	dB (A)
DF0401005XXLN	•	•	•	5	4500	0.10	0.50	4.5	1.49	24
DF0401005XXMN	•	•	•	5	5500	0.16	0.80	5.1	2.49	29
DF0401005XXHN	•	•	•	5	6500	0.25	1.25	6.8	4.04	34
DF0401012XXLN	•	•	•	12	4500	0.06	0.72	4.5	1.49	24
DF0401012XXMN	•	•	•	12	5500	0.07	0.84	5.1	2.49	24
DF0401012XXHN	•	•	•	12	6500	0.10	1.20	6.8	4.04	29
DF0401012XXUN	•	•	•	12	7500	0.12	1.44	7.5	4.39	34
DF0401024XXLN	•	•	•	24	4500	0.05	1.20	4.5	1.49	38
DF0401024XXMN	•	•	•	24	5500	0.06	1.44	5.1	2.49	24
DF0401024XXHN	•	•	•	24	6500	0.07	1.68	6.8	4.04	29
DF0401024XXUN	•	•	•	24	7500	0.08	1.92	7.5	4.39	34

Specification are subject to change without notice.

Remark:

- (1) Customized specifications are designed accordingly.
- (2) Function type is optional
- (3) The Max air flow and the speed are measured in free air, max. pressure is measured at zero air flow.
- (4) Noise is measured in anechoic chamber in free air one meter from intake side.
- (5) Specification are subject to change without notice please visit our web site: